

R-9091 Mounting kit - FOR "OMP" BOTTOM MOUNT SEATS

INSTALLATION INSTRUCTIONS: BOTTOM MOUNT BRACKETS FOR OMP TO FACTORY 996/BOXSTER SLIDERS

Brey-Krause R-9091 bottom mount brackets adapt OMP models of bottom mount seats to 996/Boxster sliders. We provide an inside (tunnel side) seat belt mounting point designed for an off road seat belt only. Not for street use.

Step 1.


Raise seat bottom to its highest position.

Step 2.


Remove (4) mounting bolts that attach the seat to the vehicle. Installation tip: *You can use a 10 mm. Six point socket to remove the bolts that fasten the seat to the floor.* Tip the seat back and carefully unplug all wiring to the seat before attempting to remove the seat from the vehicle. Do not start car until wiring has been reconnected.

Step 3. Carefully remove the seat from the vehicle.

Step 4. Remove sliders from the seat by removing (2) fasteners at the front of each slider and (2) fasteners at the rear of each slider. (The rear fasteners require a torx T-40 allen key for removal.) Note the position of the fore/aft-adjusting rail relative to the sliders for reassembly.

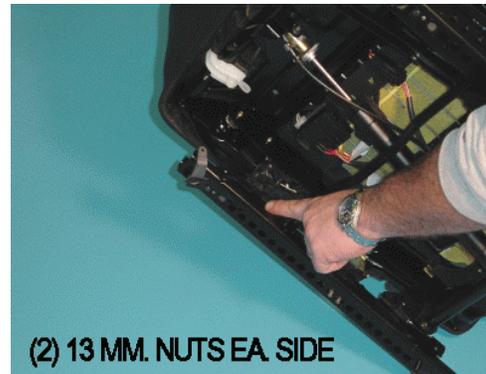

Step 5. Attach the Brey-Krause side mounts to the sliders as shown using factory hardware. (Removable Loctite is recommended). **If also installing Brey-Krause R-9030 anti-submarine strap, begin installation now.**

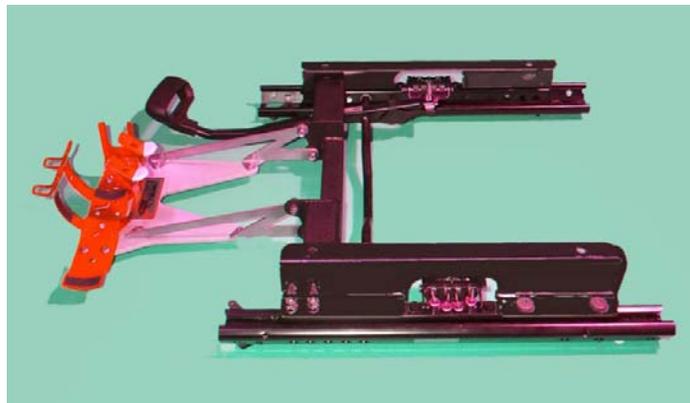

Step 6. Check all fasteners, attach seat to slider/side mount assembly before installing into the vehicle. (Install supplied shims under back of R-9091 bracket if mounting optional R-9030 anti-sub strap under front of R-9091 bracket.)

Performance driving events are by nature potentially hazardous to your health. Brey-Krause Mfg. Co. Inc. shall not be liable for injury, consequential, or other types of damages resulting from the use or misuse of our products. Proper installation of these parts is critical and should only be done by a professional shop.